
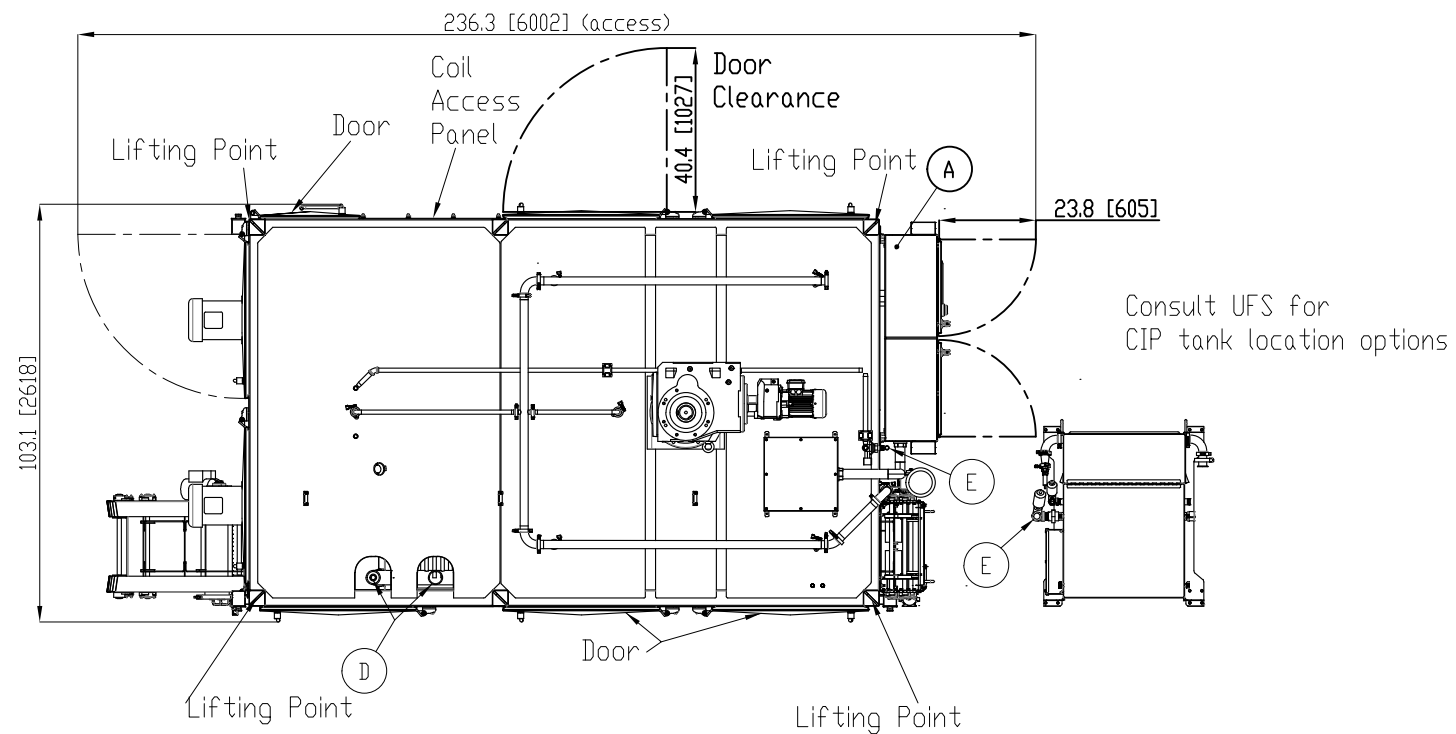
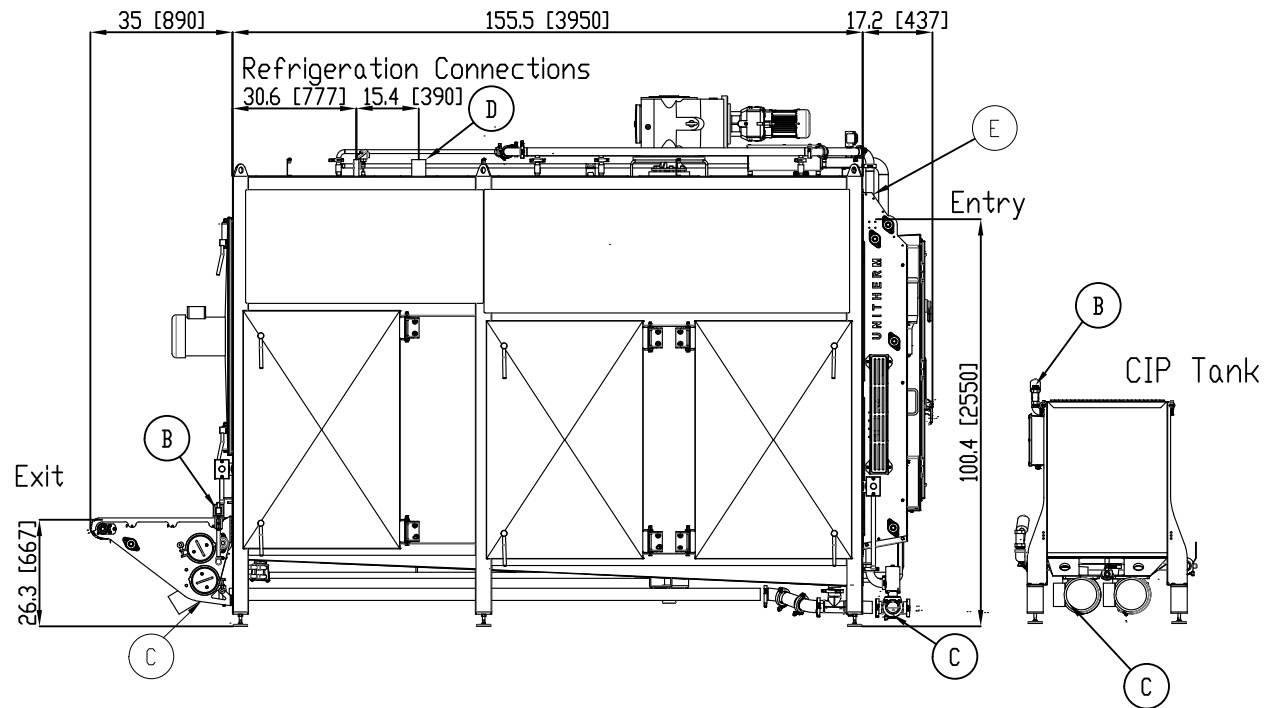
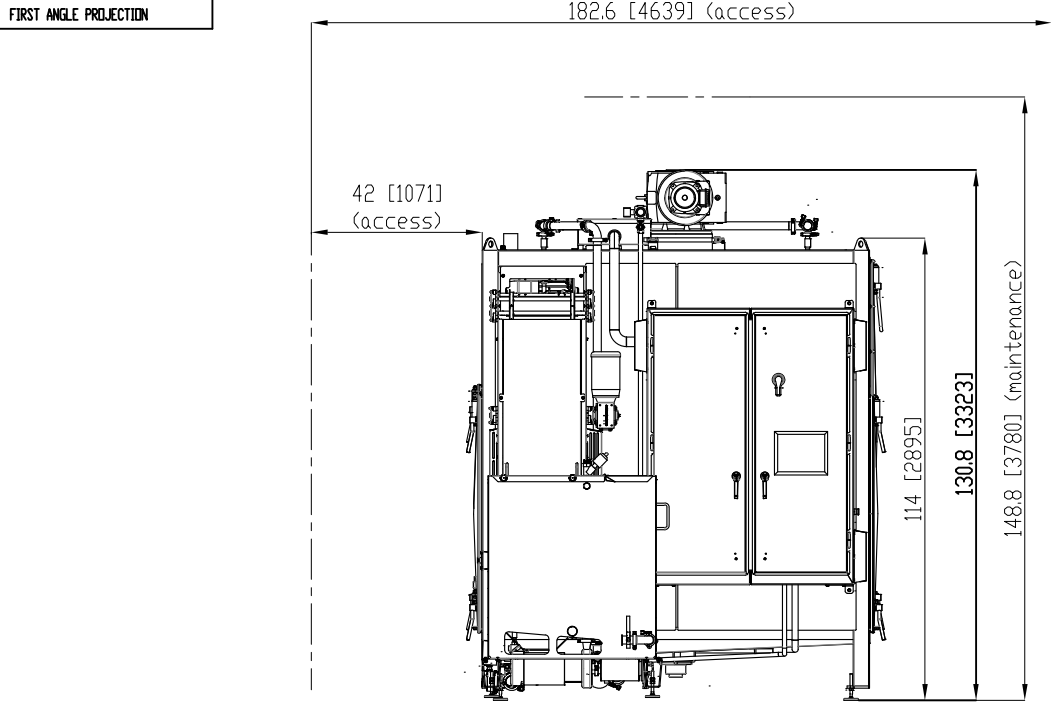





		39600 - Mini (16") Spiral Chiller
UTILITY	IDENTIFIER	SERVICE REQUIREMENT
ELECTRICAL	A	USA - 480VAC, 52 AMP, 3PH, 60Hz
		AUS - 415VAC, 60 AMP, 3PH, 50Hz
		EUR - 380VAC, 65 AMP, 3PH, 50Hz
WATER	B	Beltwash spraybar 1/2" NPT (12mm) CIP 1" NPT (25mm)
DRAINS	C	Beltwash 3.0" (76mm) Sanitary Chiller Main 3.0" (76mm) Sanitary Oven/CIP 3.0" (76mm) Sanitary (all piped to single outlet)
REFRIGERATION	D	Refrigerant/Feed Type: To be Specified 30 TR (Nominal) @ +10F (-12C) / -40F (-40C) [Chilling/Freezing] 1X 1.00" SST LIQ. ; 1X 3.00" SST SUC. ; Hot Gas Defrost (by others) [Subject to vary based on Refrigeration specified]
STEAM	E	CIP 1.5" NPT (38mm) Steam Sanitization 1" NPT (25mm) 800 LB/HR @ 40PSI (364 KG/HR @2.8 bar)
COMPRESSED AIR	F	CIP 1/4" - Less than 0.1 CFM (2.8 m/min)
EXHAUST	G	Not required - option declined by client Up to 1300 CFM (42 m³/min) 8.0 INCH (200 mm) DUCT

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 502 Industrial Road Bristow, OK 74010 Tel: 918-367-0197 Fax: 918-367-5440 unitherm@unitherm foodsystems.com	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNITHERM FOOD SYSTEMS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNITHERM FOOD SYSTEMS, INC. IS PROHIBITED.		
		DIMENSIONS ARE IN INCHES		DRAWN			ECN:		
		TOLERANCES:		CHECKED			TITLE: 16" Spiral Freezer w/ CIP System		
		FRACTIONAL: ± 1/32"		ENG APPR.					
		ANGULAR: MACH ± 0.5° BEND ± 1°		MFG APPR.					
		TWO PLACE DECIMAL ± 0.03		Q.A.		SIZE DWG. NO. S39600			REV
		THREE PLACE DECIMAL ± 0.015							
		INTERPRET GEOMETRIC TOLERANCING PER:		COMMENTS:		SCALE: 1:40 WEIGHT:			SHEET 1 OF 1
		MATERIAL							
NEXT ASSY	USED ON	FINISH							
APPLICATION		DO NOT SCALE DRAWING							